



Carbon monoxide alarm
&
Gas leak detector
Detailed instructions



About GasDot




When the GasDot device is connected to a cell phone to detect gas leaks, the app is activated and synchronized with the device for safety checks.

After gas leak safety inspection, use it as a permanent carbon monoxide alarm by attaching it from the cradle installed at the bottom, 30cm distance from the ceiling in a place where you want to detect carbon monoxide leak, such as a boiler room.



The silicone strap, component can be connected to the hook of the device and hung away from the place where the cradle is installed.

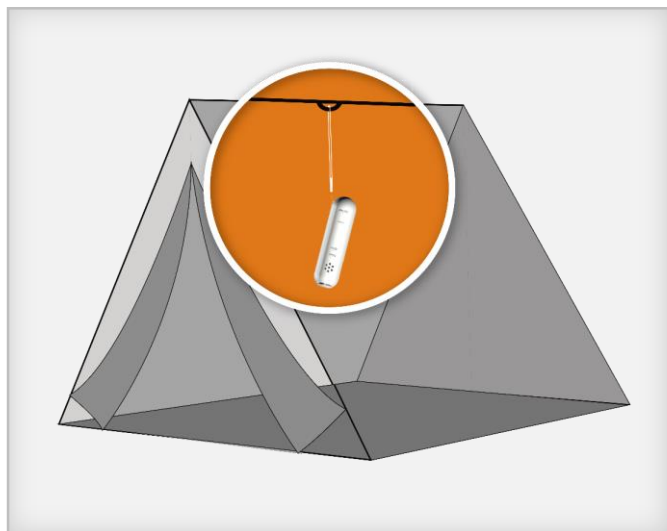


It can be detached from the cradle and carried to use as a carbon monoxide alarm at travel destinations such as camping and pensions.




Enjoy a safer trip with GasDot




Guidance on using the GasDot app & device connection

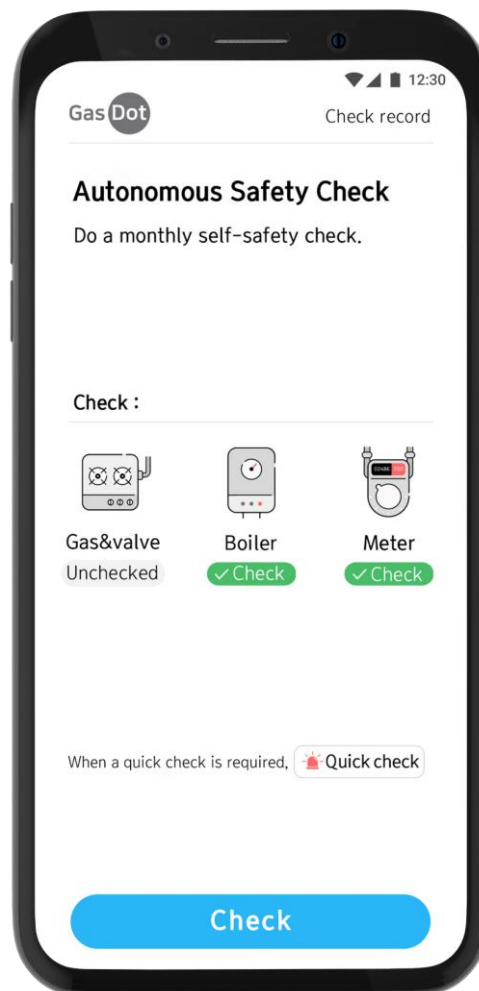

Gas leak check – Preparation

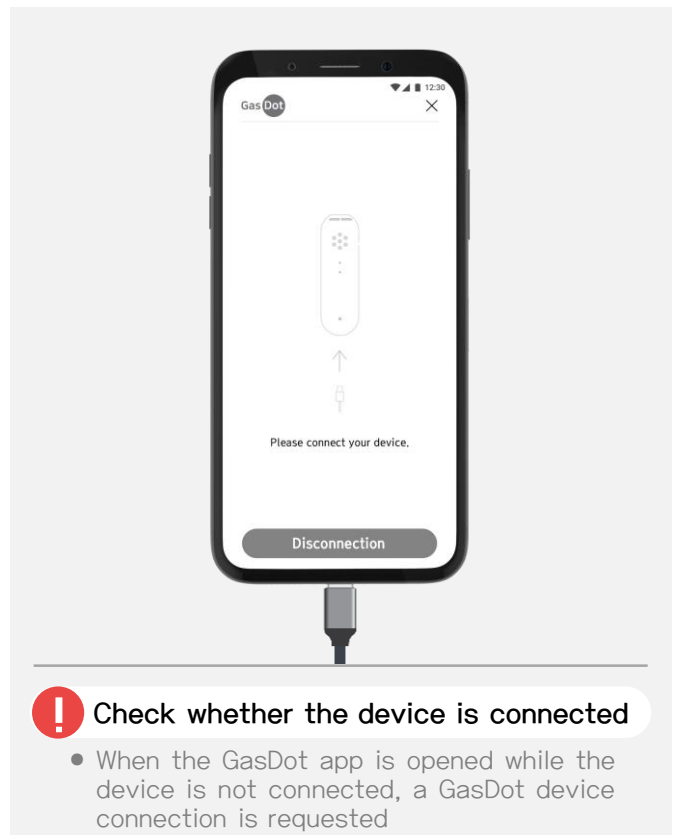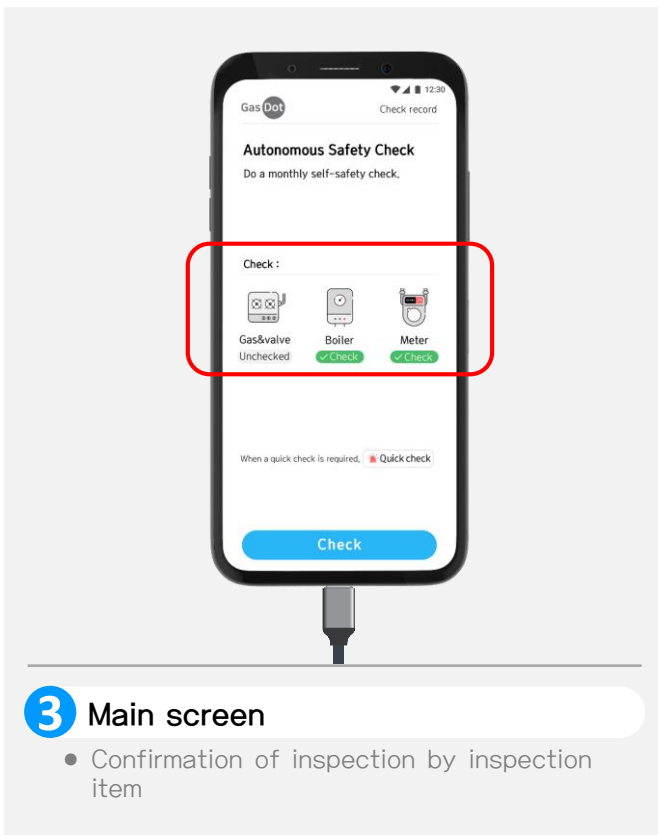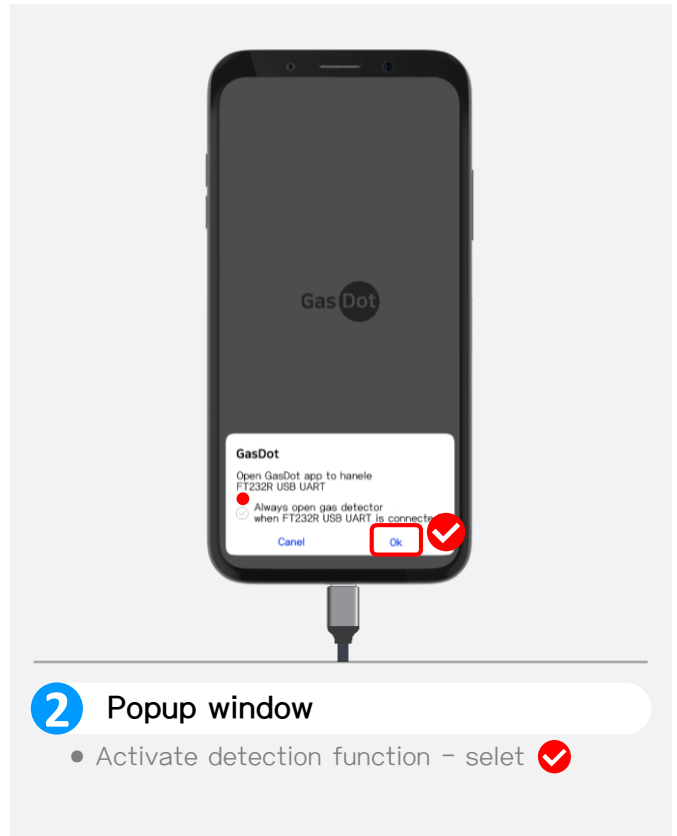


Gas leak check – Self check

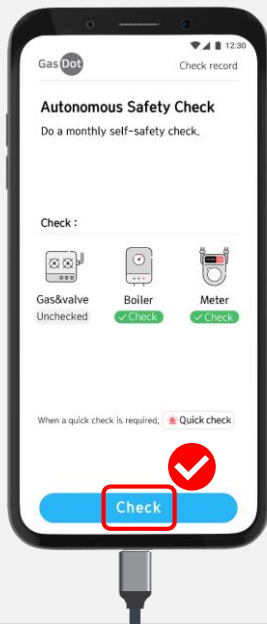


1 Check selection

- Autonomous inspection selection on the main screen

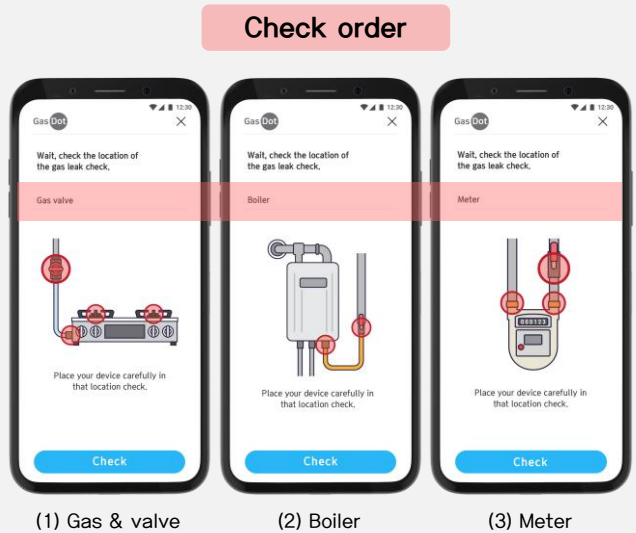

2 Inspection guide screen

- After checking the inspection location for each device, select a combustor and conduct inspection

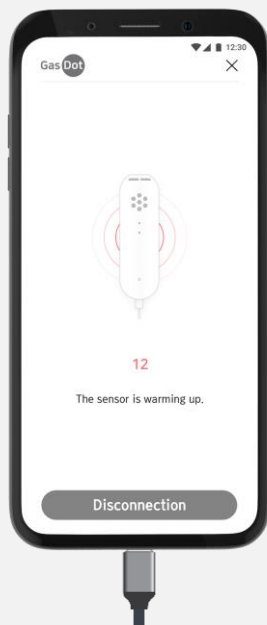

3 Sensor preheat


- Device connection normal

Gas leak check – Self check



4 Start check

- Start after positioning the GasDot device within 3cm of the point to be inspected

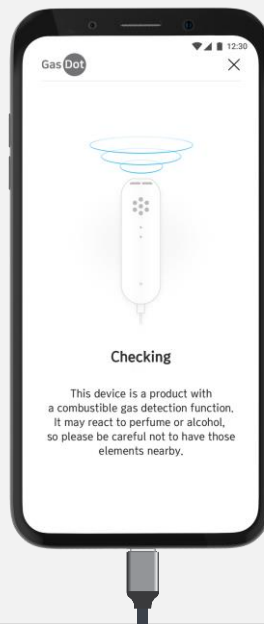


5 Checking

- Checking

POP UP



or

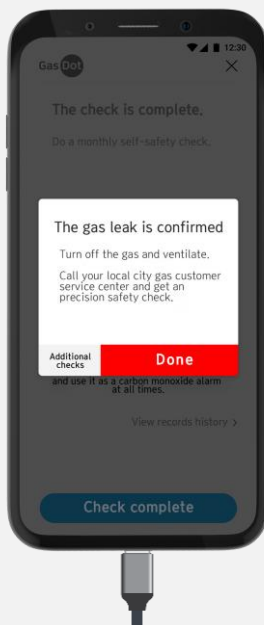

6 Check complete

The GasDot that has completed inspection continues to be used as a carbon monoxide alarm after fastening in to the cradle.


✓ Clear

Select additional check or shut down

! Gas leak


Follow the instructions to report gas leak

Gas leak check – Quick check

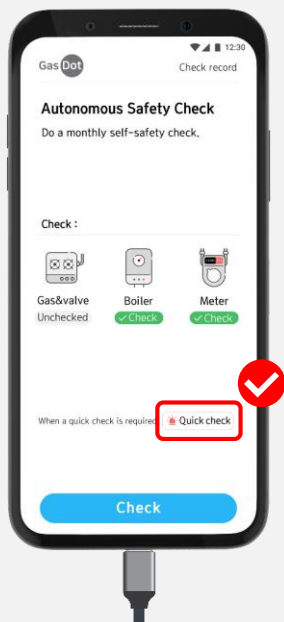

1 Select quick check ✓

- Select quick inspection on the inspection main screen

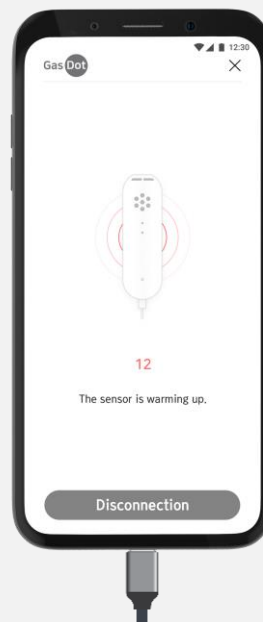

2 Sensor preheat

- In case of insufficient preheating



3 Start check

- Start after positioning the GasDot device within 3cm of the point to be inspected




4 Checking


- Checking

Gas leak check – Quick check

POP UP

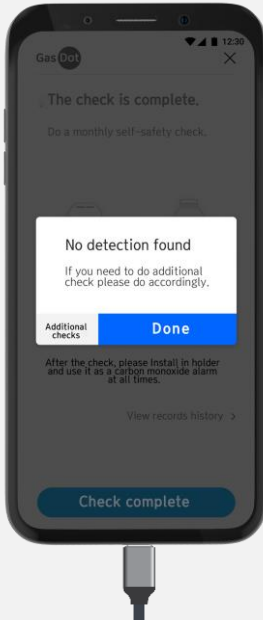

or

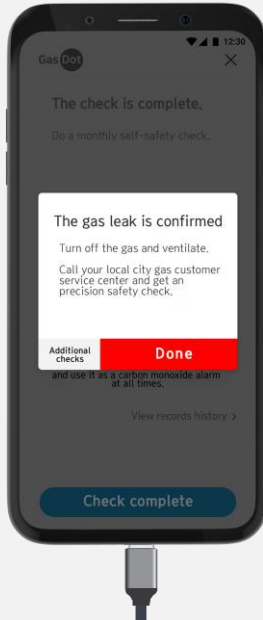

Clear

Select additional check or shut down



Gas leak


Follow the instructions to report gas leak



Check complete


The GasDot that has completed inspection continues to be used as a carbon monoxide alarm after fastening in to the cradle.

Gas leak check – check record

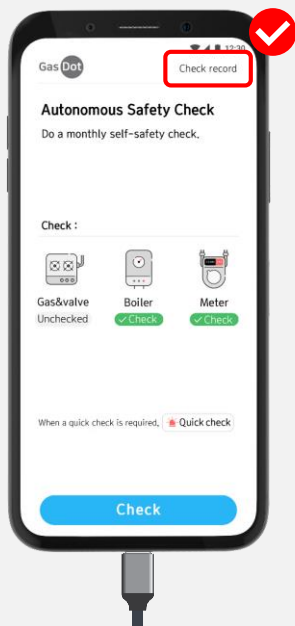

1 Select check record

- Select inspection record on the main screen

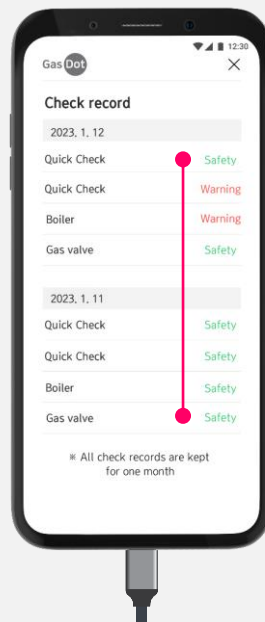

2 Check inspection record

- Scroll to check inspection history
- All inspection records are kept for one month

Gas leak check – completed

